



## Wallbox AC 22 kW BASE

A wallbox is a resistant charging station for charging all electric cars on the EU market with alternating current (AC) and electric power up to 22 kW. It is designed to be used outdoors as well as in garages, with the possibility of installation on the wall (wallbox) or on the profile anchored to the ground (pole mount). According to the customer's requirements the wallbox can be equipped with a socket or a cable, if needed with a special twisted cable. The basic "Base" version can work locally, that means it can start charging automatically as soon as the vehicle is connected or after the identification with a RFID card. The power of the station can be managed in the range of 0 - 22 kW by a local unit.





|                     | Wallbox socket        | Wallbox with integrated cable | Wallbox with twist cable | Doublebox socket    | Doublebox with integrated cables | Doublebox with twist cables |
|---------------------|-----------------------|-------------------------------|--------------------------|---------------------|----------------------------------|-----------------------------|
| Output power        | 0-22 kW               |                               |                          | 0-44 kW             |                                  |                             |
| Max. output current | 0-32 A                |                               |                          | 0-63 A              |                                  |                             |
| Input voltage       | 3× 400 V              |                               |                          |                     |                                  |                             |
| Cable length        | w/o cable socket only | straight cable 5 m            | twist cable 4 m          | w/o cable 2× socket | 2×straight cable 5 m             | 2×twist cable 4 m           |
| Plug*               | Type2 Mennekes        |                               |                          |                     |                                  |                             |
| IP protection       | IP 54                 |                               |                          |                     |                                  |                             |
| Weight              | 6.5 kg                | 9.5 kg                        | 10.0 kg                  | 18.5 kg             | 23.5 kg                          | 26.0 kg                     |
| Dimensions          | 194×320×120 mm        | 266×320×120 mm                |                          | 385×550×140 mm      | 529×550×140 mm                   |                             |
| Operating temp.     | from -25°C to 40 °C   |                               |                          |                     |                                  |                             |
| Operating humidity  | from 5 % to 95 %      |                               |                          |                     |                                  |                             |
| Order code          | EL-WB22-BASE-S        | EL-WB22-BASE-C                | EL-WB22-BASE-TC          | EL-WB22-BASE-TC     | EL-DB22-BASE-C                   | EL-DB22-BASE-TC             |

\* WallBox can be equipped with a Type1 plug or another cable length on request

# SmartMeter


Device for maximization of electric vehicle charging speed which prevents circuit breakers to shut off unintentionally. The SmartMeter is suitable for application in homes and small companies.

SmartMeter measure the consumption of your building or dedicated circuit in real time and assesses the power available for charging station. The SmartMeter can control single charging station equipped with one or two charging points. The current is measured by split-core current transformers ensure quick and easy installation.

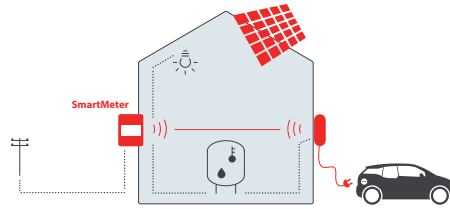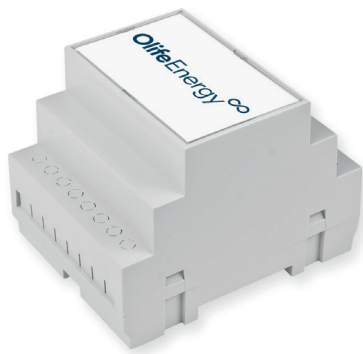

## Example installation

The SmartMeter is adjusting charging power of single OlifeEnergy charging station. It prevents the circuit breaker to shut-off unintentionally by its overload. It can be set to charge only from surplus energy from photovoltaic system and charge only when remote communication signal is active. The most suitable application is for private and small company charging infrastructure.

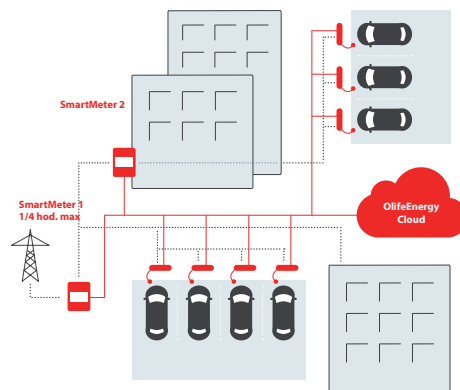

## Power control of larger infrastructure

For company e.v. fleet, apartment building or large company establishment charging it is possible to use SmartMeter in cooperation with external control system. Together they secure stability of the complete system, preventing blackouts and penalty for exceeding maximum ¼ hour power consumption limits.

# Solar management

Solar management is an extension function for regular (AC) OlifeEnergy charging stations that supports communication with solar inverters for home photovoltaic power plants. Communication is ensured via a local network (LAN) via WiFi or Ethernet via the ModBus TCP protocol. The advantage is the extended possibility of managing and setting up the station on the local network.

Cooperation with the inverter allows the station to control the charging of the electric car so that the highest possible charging speed is achieved with the maximum efficiency of the produced solar energy without the need to install a SmartMeter.

This function is available for the OlifeEnergy Wallbox, DoubleBox and AC stand charging stations. Currently, these devices are compatible with GoodWe, SOLAX, Huawei and SOFAR inverters.

# We provide

- Selection of a suitable wallbox according to customer requirements
- Technical documentation for preparation before installation
- Equipment installation
- Equipment inspection according to valid standards
- User training
- Post-warranty service and technical support
- Cooperation with partners in the field of photovoltaic power stations

# Accessories

- Mounting pole
- Secondary electricity meter
- Charging cables of various lengths



CZ: +420 556 621 030  
INT: +420 556 621 020

CZ: obchod@sectron.cz  
INT: sales@sectron.cz

SECTRON s.r.o.  
Josefa Šavla 12, 709 00 Ostrava, Czech Republic